



Accountto**Card** REVALUE STATION

Take the next step to a completely cashless system

The Heartland Micropayments Account to Card Revalue Station provides a convenient, secure method of transferring electronic funds from a credit or debit card account to a Micropayments electronic cash card. Functioning as a merchant POS transaction system, the Account to Card helps keep operating costs to a minimum. The unit features an easy to read display, integrated receipt printer, and can support a new Card Dispenser.

Setup is fast and easy requiring only a standard power connection and a single telephone line.

Save time on reconciliation with full reporting from both the transaction processor and the internal report generation capabilities of the unit.

For clients in the United States, Heartland Payment Systems is proud to handle all of your processing needs. A tour of our Online Merchant Center is available at:

www.heartlandpaymentsystems.com/OMCDemo/



Benefits and Advantages

- ✓ Interac Certified for Canada
- ✓ Secure PIN Pad meets all current banking requirements
- ✓ Full reporting capabilities
- ✓ Quiet, fast thermal printer with easy-loading mechanism
- ✓ Large graphic display for high visibility

Physical


- ✓ Mounting options include pedestal and wall-mount
- ✓ Unit operates on standard 110VAC power
- ✓ Utilizes one dedicated analog phone line
- ✓ Secure 100% stainless steel enclosure for unattended operation

Options


- ✓ Card Dispenser

Technical Specifications –AccounttoCard

Physical Dimensions	8"H X 12"W X 12"D (excluding wall-mount)
Weight	28 lbs (with Dispenser)
Physical Security	Tamper resistant, dual-locking, stainless steel housing
Exterior Finish	Corrosion resistant Stainless Steel
Electrical Requirements	120 VAC, < 2 Amp max load
Communications	Dial-Modem
Add Value Methods	Credit, Debit
Card Dispenser Capacity	120 Cards (30 mil) - <i>optional</i>
Receipt Printer	Thermal - 2.25" paper size (approx. 140 receipts per roll)
Operating Temperature	41 F to 104 F (+5 C to +40 C)
Relative Operating Humidity	20% - 80%, non-condensing
Access Options	Keyed Front Access
Mounting Options	Wall Mounted – 10"H X 12"W X 12"D (Stainless Steel) Pedestal - 38"H X 12"W X 12"D (Cold Rolled Steel, Powder Coat)

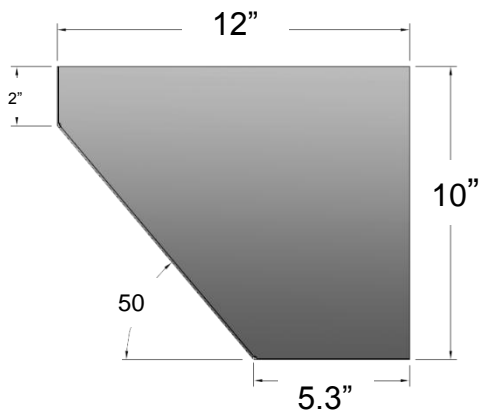

Wall Mount Side View

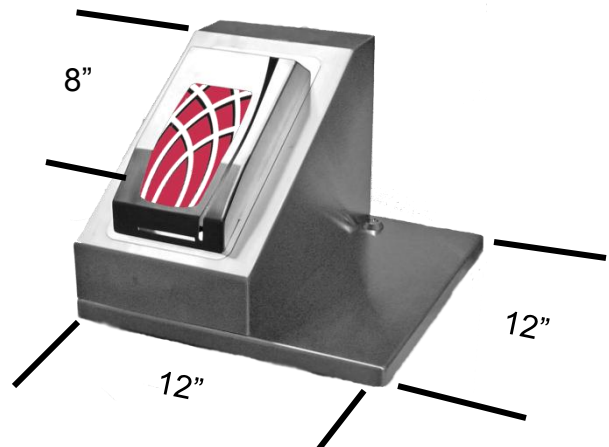

AccounttoCard
REVALUE STATION